


AQUALISA

MIDAS™ 220 SHOWER COLUMN

MD220SC

WITH ADJUSTABLE HEAD AND FIXED DRENCHER
- HP/COMBI

DIMENSIONAL DRAWINGS

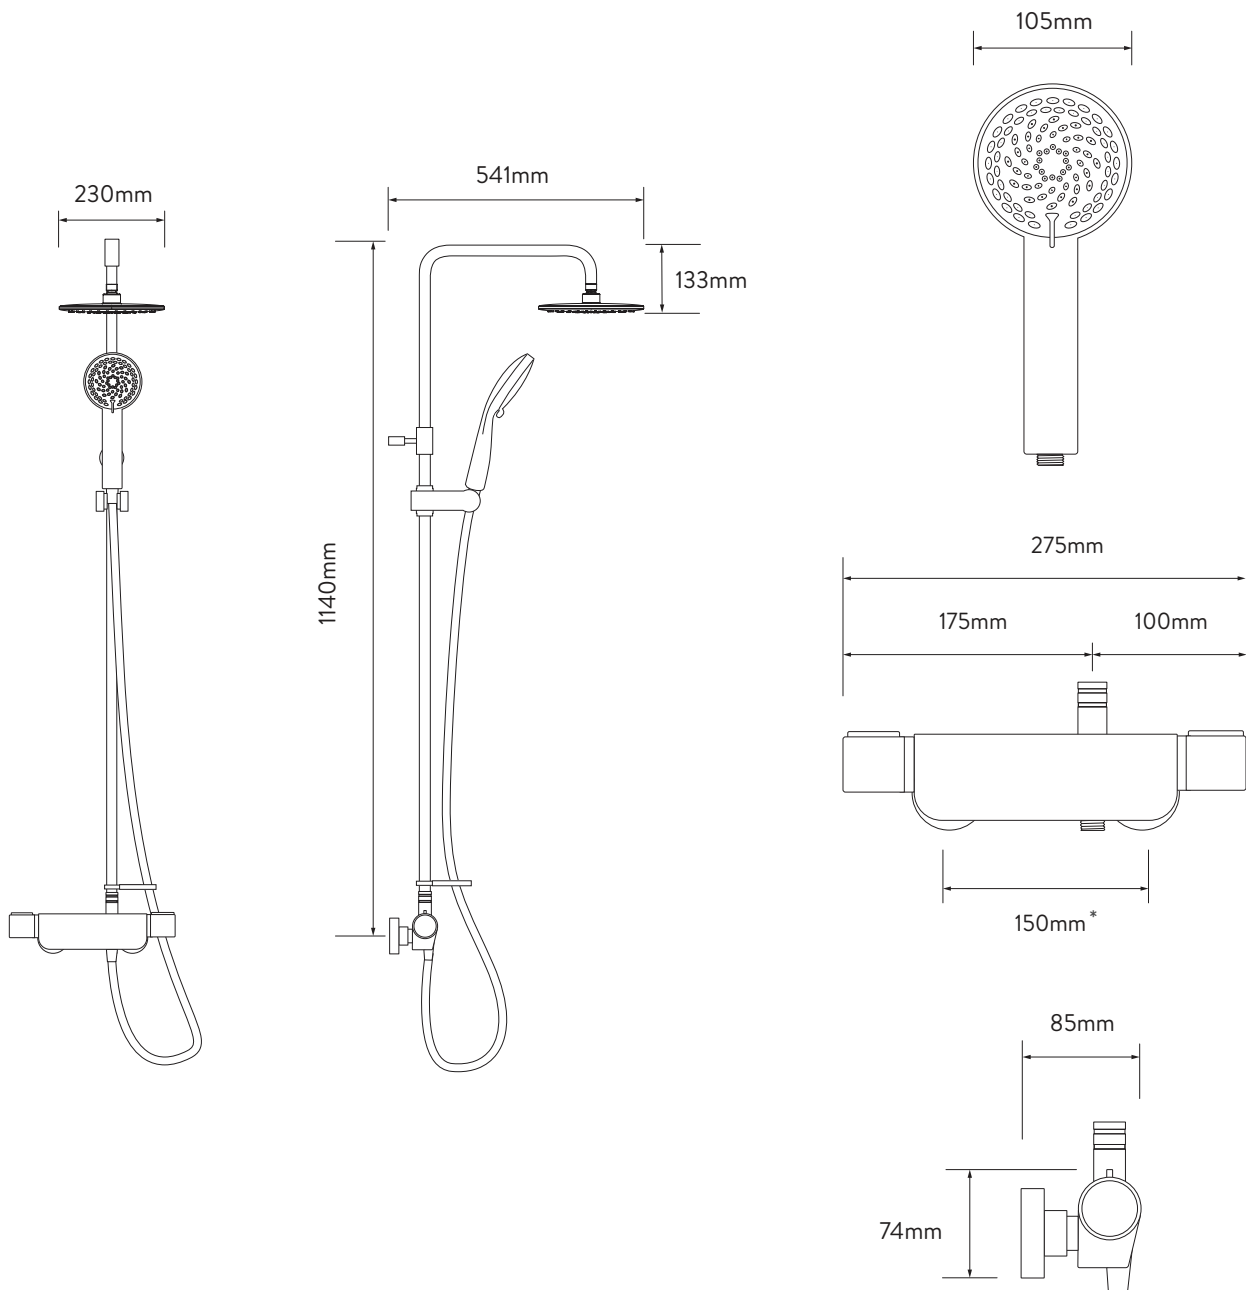

*Pipe centres can be adjusted between 130mm-170mm using supplied elbows

AQUALISA

MIDAS™ 220

SHOWER COLUMN



MD220SC

WITH ADJUSTABLE HEAD AND FIXED DRENCHER
- HP/COMBI

TECHNICAL SPECIFICATIONS

| | |
|-------------------------------|--|
| Minimum pressure requirements | 1 bar |
| Maximum pressure requirements | 10 bar |
| Inlet fitting connections | 3/4" BSP |
| Inlet supply positions | Hot/left, cold/right (as viewed from the front) |
| Outlet connections | 1/2" BSP |
| Valve inlet centres | 150mm (Pipe centres can be adjusted between 130mm-170mm using supplied elbows) |
| Supply temperature | 5 - 20°C Cold Supply |
| | 55 - 65°C Hot Supply |
| Materials | Brass |
| | Metal and plastic |
| Water System | Boosted gravity |
| | Combi and balanced High Pressure systems |
| Features | Thermosafe |
| | Diverter |
| | Adjustable height slider |
| | Flow control |
| | Safe touch |
| | 105mm, 4 spray patterns one of which is eco - 25% less flow |
| Colour | Chrome |
| Approvals | WRAS Approval pending |
| Guarantee period | Valve - 5 years |
| | Shower head and kit - 2 years |